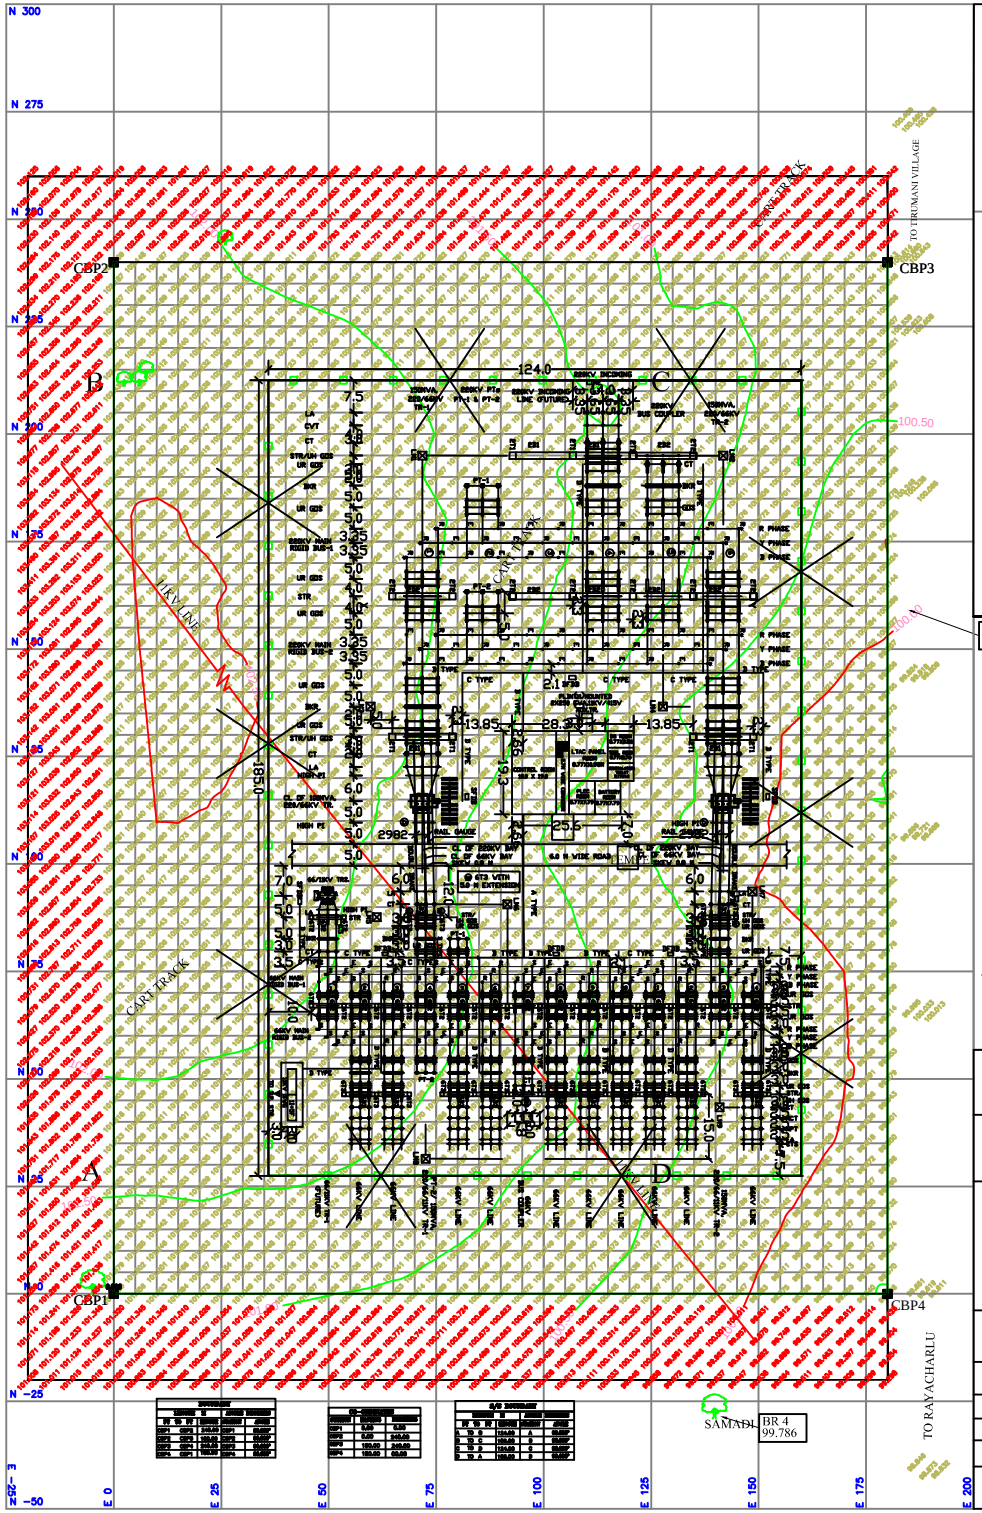



Area Statement

AREA WITHIN BOUNDARY POINTS

1) CBP1 to CBP4 = 43200.00 Sq.mt.
= Acres=10 Guntas=22.96

2) A TO D = 22940.00 Sq.mt.
= Acres=5 Guntas=26.72

NOTE:-

1) ALL DIMENSIONS AND LEVELS ARE IN METERS.
2) BLOCK LEVELS HAVE BEEN TAKEN AT 5.0 x 5.0 GRID AND CONTOURS HAVE BEEN DRAWN AT 0.50 M INTERVALS.
3) A BENCHMARK TBM 1 HAS BEEN ESTABLISHED ON TOP OF THE ROAD TOP AND ASSIGNING IT TO A VALUE OF +100.000 M.

LEGEND

- Perimeter Boundary with Pillars, Wire Fence,
- Main Power line with Pylons, Power line, Telegraph/Telephone line
- Road : Metalled, Unmetalled, Cart track, Footpath
- Building : Permanent, Under construction, Temporary
- Nala : Defined, Undefined, Stream : Defined, Undefined
- Hut, Borewell, Pumphouse, Temple, Hand Pump — PH
- Embankment, Cutting, Quarry, Hedge
- Boulders, Rockyground, Relative height
- Contour and form line with value, Sheet rock, Cliff, Field Bund — 800
- Trees : Jackfruit, Ordinary, Coconut, Neem , Bamboo, Others
- Temporary Bench Mark, Spot level — BM ⊙ BM–1 / 100

CLIENT	KARNATAKA RENEWABLE ENERGY DEVELOPMENT LIMITED
TITTLE	CONTOURING/BLOCK LEVEL SURVEY FOR THE PROPOSED SITE FOR B-5 SUB-STATION @ SY-NO 154 NEAR THIRUMANI VILLAGE
SEASON JAN-2016	5M 0 5 10 15 20 25M
SCALE 1 : 1000	5M 0 5 10 15 20 25M
DRAWN	DRAWING No.
M.N.SWAMY	